

# Cielo Lite + 22"

All-In-One Fanless PoS Terminal



**Beautiful, robust and efficient. Cielo Lite + 22" is a truly distinguished PoS terminal.**

Endowed with a slim IPS LCD display and sleek vent-free chassis, Cielo Lite + 22" is a beautiful and compact PoS terminal.

The rugged splash and dust-proof unit boasts a small space saving footprint and a bright, backlit, high-resolution display ensuring ease-of-use and brilliant image quality whilst remaining power efficient. Cielo Lite + 22" has a strikingly elegant appearance yet it can endure the toughest retail and hospitality environments.


## Features

- Upright design, small footprint - The upright design delivers a sophisticated look which will appeal to high-end environments such as fashion outlets, restaurants, and hotels.
- Brilliant display - Cielo Lite + 22" features a stunning 22" IPS LCD bezel free screen able to display vibrant and sharp content at 1920 x 1080 pixels
- Projected capacitive interface Cielo Lite + 22" utilises a projected capacitive touch interface ensuring exceptional responsiveness and multi-touch capability.
- Features IPS (In-Plane Switching) technology for superior viewing angles and an enhanced touch experience



## Cielo Lite + 22" All-in-One Fanless Terminal

Model	Cielo Lite + 22"
Case Color	Black
Dimensions (including stand)	517.4 (W) X 351.7 (H) X 219.0 (D) mm
Net Weight (Approx.)	7.8 kg
Shipping Weight (Approx.)	10.8 kg
Power Supply	DC 12V 6.67A
CPU ; Cache 2M	Intel Celeron J1900/N2930 Quad Core
BIOS	UEFI
Graphics	Intel HD Graphics
Memory	DDR3 SO-DIMM 2G,(up to 8G DDR3 Memory)
I/O connectors	3 X COM Port (1xDB9;2xRJ45), 2 X Dual USB (1xDual for USB3.0; 1xDual for USB2.0), HDMI & VGA, 1 X RJ45 for 10/100/1000Mbps LAN, 1 X Mic In; 1xLine Out, 12V DC in
LCD Size / Type	21.5" diagonal TFT Panel
Panel Resolution	1920 X 1080 (Max.)
Display Color	16.7M (6 bits + HI-FRC)
Contrast Ratio	3000:1
Brightness (without touch)	250 nits (typical)
(Projected Capacitive)	225 nits (typical)
Response Time	18ms (typical)
Viewing Angle -- Horizontal/ Vertical	178 ° (typical) / 178 ° (typical)
HDD	2.5" Slim HDD SATA II controller 5400rpm, 320 GB (or above)
Audio OUTPUT	1W Speaker / 2 Channel
Temperature - Operating / Storage	0°C ~ +35°C / -20°C ~ +60°C
Humidity - Operating / Storage	20% ~ 80% / 10% ~ 90% (Noncondensing)
Control Key	Power On/Off, Brightness Up/Down
Compliance	TBD (CE, FCC, TUV, UL, CUL) RoHS and IPX1
Touch Technology	Projected Capacitive 10 Points
Touch Interface	USB

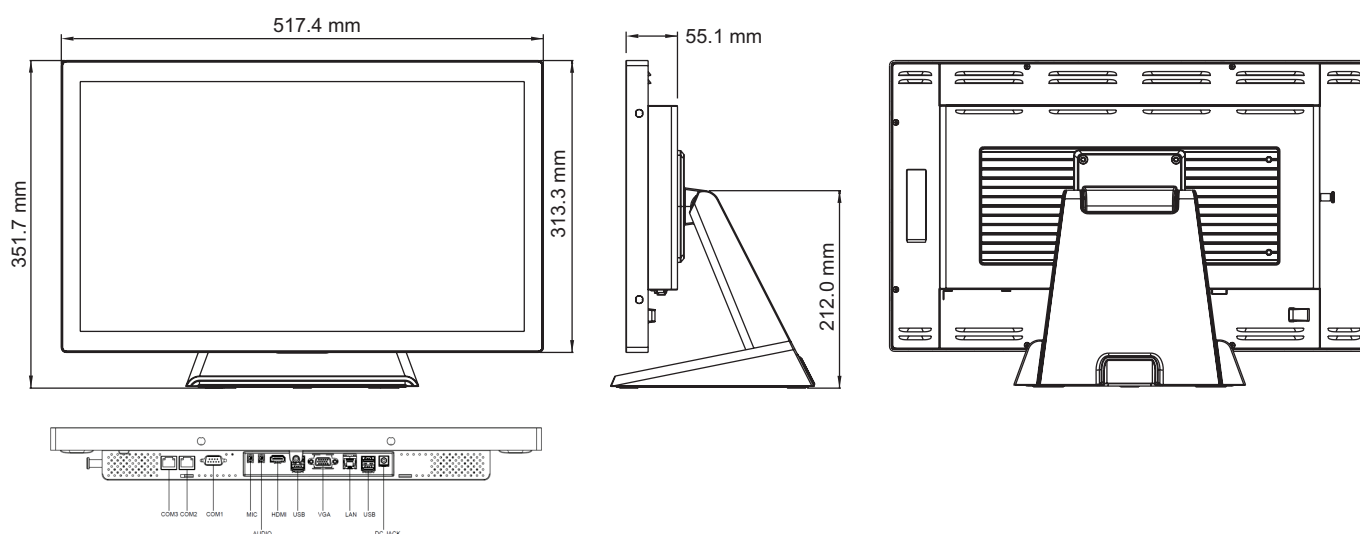

Box Technologies Head Office  
 20 Thame Park Business Centre  
 Wenman Road  
 Thame, OX9 3XA  
 United Kingdom  
 T: +44 (0) 1844 264 000  
 E: sales@boxtechnologies.com

Box Technologies Sweden  
 Upplagsvägen 1, 4 tr  
 117 43 Stockholm  
 Sweden  
 T: +46 (0) 8 120 80 320  
 E: sales@boxtechnologies.se

Box Technologies Norway  
 Torgbygget  
 Nydalsveien 33  
 0484 Oslo  
 T: +47 22 18 26 35  
 E: sales@boxtechnologies.se