

Cielo Modular

Product Overview





Powerful and versatile, the Cielo Modular is a high performance point-of-sale PC that is designed with high flexibility and scalability in mind.

The unit features an Intel Celeron, Core i3 and Core i5 processor options, and houses a dual SATA storage bay.

Designed for retail connectivity, the Cielo Modular features a rich I/O interface gifting the terminal a high level of flexibility, ensuring the system continually delivers a powerful and reliable service for your business needs.




Features

-  Choice of Intel Celeron, Core i3 or Core i5 processors
-  Easily servicable and upgradeable
-  Extensive I/O connectivity
-  Robust, die-cast aluminium design



Cielo Modular		
Motherboard	Chipset	Intel® H61 (Intel® QM67 vPro optional)
	Processor	Intel® Celeron® G540, 2.5Ghz / Intel® Core i3-2120S, 3.3Ghz / Intel® Core i5-2400S, 2.5Ghz (vPro optional) (Intel® Core i5-2510E, 2.5Ghz vPro optional)
	System memory	2GB (G540) / 4GB (i3/i5), Maximum 8GB (1x204-pin DDR3)
	Storage Device	1 x 2.5" SATA HDD
Storage Device	Speaker	System Motherboard Beeper
Construction		Aluminium Die-casting / SECC
Ports:	Serial Ports	4 x External: COM1, COM2, COM3, COM4 (DB9) Additional COM 7 (24v powered)
	Printer Port	1 x Bi-directional Parallel port
	USB Port	6 x External (4 Rear + 2 Front) Additional 3x USB Powered (rear)
	Cash Drawer Port	1 x RJ11 (12V)
	Keyboard / Mouse	1 x PS/2
	LAN Port	1 x RJ45 Gigabit
	Audio Port	1 x Line Out, 1 x Mic In
	Video Output	1 x VGA (HD15), 1 x DVI-D
	DC Output	2 x 12V DC Jack 2.5mm
Optional I/O Panels	Type A	Serial Port: COMA & COMB (RJ45) with RI / 5V/ 12V Selectable; DC Output: 1 x 24V; 1 x Mic In
	Type B	Serial Port: COMA & COMB (RJ45) RI / 5V/ 12V Selectable; Powered USB Port: 1 x 24V; 1 x Mic In
	Type C	1 x Bi directional parallel port, Serial port:COMA & COMB (R545) R1/5V/12V selective
	Type E	1 x Bi directional parallel port, Cash Drawer port; 2 x (RJ11) 12V; 1 x Mic In
	Type G	1 x Bi directional parallel port, Powered USB port: 3 x 12V
	Type H	1 x Bi directional parallel port, Powered USB Port: 1 x 24V, 2x 12V
Power supply		250W Internal ATX Power Supply
Certification	EMI / Safety	CE, FCC Class A
Environment	Operating Temperature	0°C - 40°C (32°F - 104°F)
	Storage Temperature	-10°C - 55°C (14°F - 131°F)
	Relative Humidity	10% - 90% (Non-condensing)
System Details	Dimensions (W x H x D)	310 x 235 x 95 mm
	Weight (Kg)	5 Kg
OS Supported		Windows XP, POSReady 2009, Windows 7, POSReady 7, Windows 8

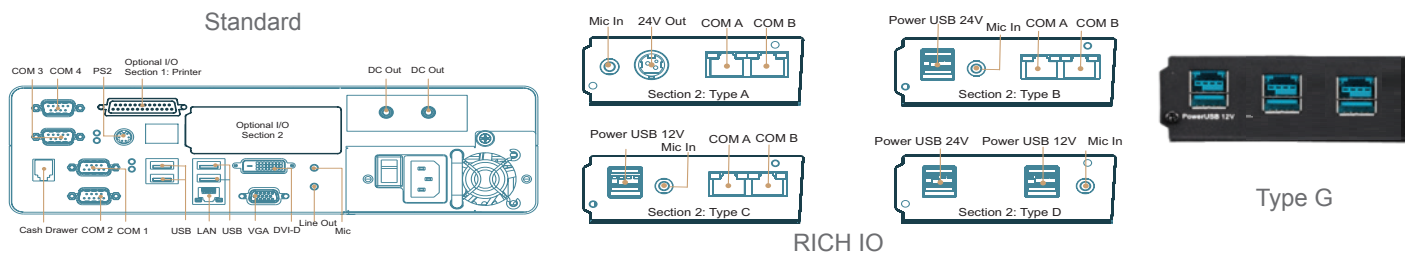

RICH IO



Box Technologies Head Office
 T: +44 (0) 1844 264 000
 E: sales@boxtechnologies.com

Box Technologies Sweden
 T: +46 (0) 8 120 80 320
 E: sales@boxtechnologies.se

Box Technologies Norway
 T: +47 22 18 26 35
 E: sales@boxtechnologies.se