



BOXTEC

EDGE 19


19" Self-Checkout Kiosk



KEY FEATURES:

- Integrated with Intel® Alder Lake-N and Meteor Lake processors
- Compatible with Windows, Linux, and Android operating systems
- 19" PCAP touchscreen for enhanced customer experience
- Comprehensive range of peripheral and accessory options
- Easy access to the motherboard box for service and maintenance
- Space-saving footprint to fit easily into any retail environment

DIMENSIONS

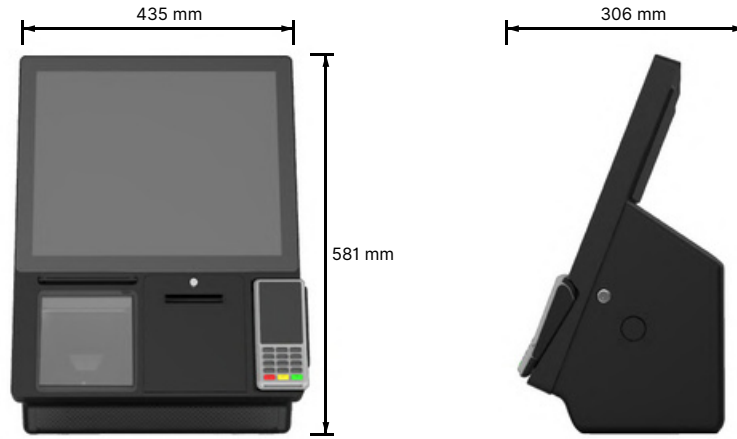

SPECIFICATIONS

	Motherboard	G35	G75U
System	Processor Memory Storage	Intel® Alder Lake N: N97, i3-N305 8GB DDR4 128GB SSD (M.2)	Intel® Meteor Lake Core Ultra 5 125U 8GB DDR5 128GB SSD (M.2)
Display	Size and Resolution Touch Screen	19" 1280 x 1024 True-Flat PCAP multi-touch	19" 1280 x 1024 True-Flat PCAP multi-touch
I/O Ports	USB Type-A USB Type-C FeDP Serial Port LAN Cash Drawer DC Jack Power Button	2 x USB3.0, 4 x USB2.0 1 x USB3.0 full-functioned (DP/PD 5V/3A, 12V/3A) 2 x Flytech proprietary miniDP (1 for main display, 1 for 2nd display) 3 x RJ48 (standard RS232) (default 0V; 5V, 12V) 1 x RJ45 1 x RJ11 1 x 4PIN (with latch) 1	4 x USB3.0, 2 x USB2.0 1 x USB3.0 full-functioned (DP/PD 5V/3A, 12V/3A) 2 x Flytech proprietary miniDP (1 for main display, 1 for 2nd display) 3 x RJ48 (standard RS232) (default 0V; 5V, 12V) 1 x RJ45 1 x RJ11 1 x 4PIN (with latch) 1
Audio	Speaker	1 x 3W	1 x 3W
Power	Power Supply	65W/19V	120W/19V
Communication	WLAN+BT	802.11 series + BT5.0 (Option)	802.11 series + BT5.0 (Option)
Peripherals (option)	RFID MSR iButton Camera Light Bar 2nd Display Scanner Printer Payment Device Top Pole Mounting Kit	RFID Reader (USB) 3-Track MSR (USB) iButton (USB) 5MP Camera (on main display) / 2MP Camera (on top pole) Light Bar Module 11.6" 2nd display Supported Honeywell 7990G, Datalogic M3450VSi, SuperLead 72CJ/7801 Supported Epson® TM-M30III, TM-T88VI, TM-T88VII, HPRT TP808 Supported Verifone P400, Ingenico LANE 3000/3600 (payment bracket only) Top Pole Module Wall-mount kit, Counter mount kit, Floor stand kit	RFID Reader (USB) 3-Track MSR (USB) iButton (USB) 5MP Camera (on main display) / 2MP Camera (on top pole) Light Bar Module 11.6" 2nd display Supported Honeywell 7990G, Datalogic M3450VSi, SuperLead 72CJ/7801 Supported Epson® TM-M30III, TM-T88VI, TM-T88VII, HPRT TP808 Supported Verifone P400, Ingenico LANE 3000/3600 (payment bracket only) Top Pole Module Wall-mount kit, Counter mount kit, Floor stand kit
Certificate	Certificate	FCC Class A, CE Mark Class A, LVD	FCC Class A, CE Mark Class A, LVD
Environment	Operating Temperature Storage Temperature Humidity	0°C ~ 35°C (32°F ~ 95°F) -20°C ~ 60°C (-4°F ~ 140°F) 20% ~ 85% RH non-condensing	0°C ~ 35°C (32°F ~ 95°F) -20°C ~ 60°C (-4°F ~ 140°F) 20% ~ 85% RH non-condensing
Dimensions	W x H x D	435 x 581 x 306 mm (17.1" x 22.8" x 12")	435 x 581 x 306 mm (17.1" x 22.8" x 12")
Weight	Weight (w/o Accessory)	13kg (28.66 lbs)	13kg (28.66 lbs)
OS Supported		Windows 10 IoT Enterprise, Linux, Android 13.0	Windows 10 IoT Enterprise, Linux, Android 13.0

※ PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE ※